

The G-WASH 12 allows automating the decoating and degreasing processes while reducing water consumption by 80%



G-WASH 12

GRÜNIG

Grünig-Interscreen AG
Ringgenmatt 14
CH-3150 Schwarzenburg
Switzerland

Phone +41 31 734 2600
Fax +41 31 734 2601
www.grunig.ch
mail@grunig.ch

G-WASH 12

Automatic decoating machine



Control unit



Hand lance



Spraying carriage



Recycled water Recycleclean



Nozzle

Particular features

- The G-WASH 12 has been designed for automatic de-coating, developing and degreasing (option) of serigraphy screens.
- **One single machine = 3 processes!**
- Compact, virtually maintenance free design, in front loader version.
- Various pressures are available: 10 or 30 bar from both sides as well as 70 bar high-pressure from the print side.
- The roller shutter door can be completely opened, with allows an optimal handling as well as a simple and efficient cleaning and maintenance.
- The chemical product is sprayed from both sides by means of double membrane pumps and fan jet nozzles. A separate pump is provided for each type of chemical.
- The quantity and atomizing of the chemical can be adjusted by means of separate pressure regulators. The fine-tuning of the chemicals among each other is also programmable.
- Whenever necessary, a separate high-pressure manual lance is provided for a manual treatment of the screens.
- Oscillating low-pressure nozzle tubes are provided for particularly delicate developing processes.
- Grünig special nozzles made from V2A with service cover have been designed for ease of maintenance and cleaning of the nozzles.
- The working width of the machine can be divided into sectors A, B and C, and the height in 2 sectors
- The sub-construction of the screen washing machine is a rugged welded construction made of chromium steel sheet V2A.

Programs

- 4 different programs F1 - F4 that can be freely programmed according to the customer's requirements.

Option L

- In the washing bay, a full-surface luminous screen is installed to provide an optimal checking possibility for the screens.

Option C 2

- Upon request, the machine can be equipped with a second chemical system (degreasing).

Option C 3

- Upon request, the machine can be equipped with a third chemical system.

Option Z


- Additional screen holder for the reception of several small screens.

Option M


- Master-Frame for the reception of 16 to 20 CD screens.

Option K

- The water conditioning and preparation system G-WASH 030 RECYCLEAN reduces the water consumption and as a result the waste water quantity by up to 90%. The entire water quantity passes through different filters and sedimentation levels before it is taken back into the recycled water circuit. A pressure build-up pump as well as a 100 micron fine-filter made of V2A are included in the scope of delivery. This option represents a considerable contribution towards a reduction of the operating costs

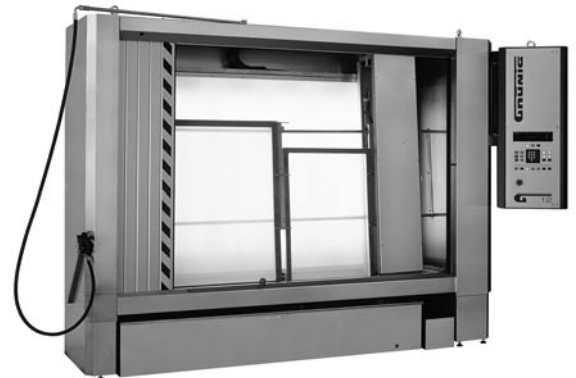

Screen format	SB Screen width	mm	1500-5000/59"-197"
	SH Screen height	mm	1600-2400/63"-94"
	Frame profile thickness	mm	10-55/0.3"-2.1"
Options	L, C2, C3, Z, M, K		
Sizes	Total width	mm	SB + 1170/46"
	Total height	mm	SH + 745/29"
	Total depth	mm	750/29.5"
Energy supply	3 x 400 V / 3 x 220 V / 50-60 Hz		
Compressed air	Connection value	Bar	6
	Air consumption	m ³ /h	3
Water consumption	Connection value	Bar	3
	Consumption with SH <1800	l/min	44
	SH >= 1800	l/min	66

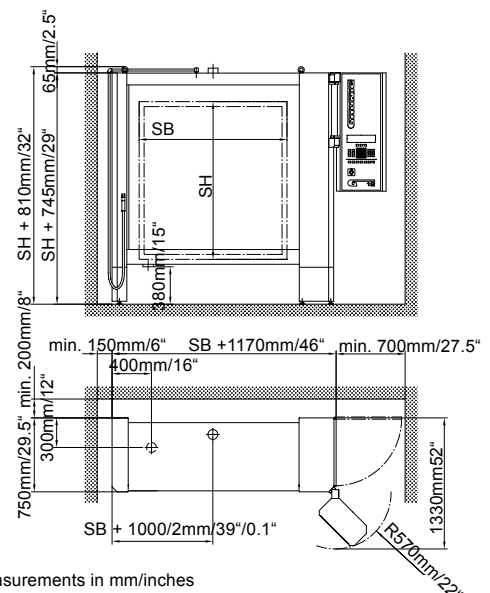

All measurements in mm/inches



The machine answers the requirements of the EU guidelines for machinery

Technical data subject to change without notice

Mai 05